

DAS SERIES



High-tech and high quality Karaoke digital amplifier with large LCD panel


This model has a large multi-purpose color LCD panel.
 The latest digital amplifier IC made it possible to make the amplifier smaller and lighter.
 The use of BTL connection enables the amplifier to be used as a high power amplifier. (BTL Power: 300W × 2ch) (DAS-400)
 "Simple mode" function (sound effect control software) gives home users easy to use.

- 10 bands equalizer
- 6 types echo
- Screen saver
- Professional / Simple mode
- LCD setting
- power amp mode
- Mute
- How to connect



DAS-400 [SE] DAS-200 [SE] RMS-300

Max Output Power	300W × 2CH (8Ω, EIAJ) : 2 speakers system 150W × 4CH (8Ω, EIAJ) : 4 speakers system	150W × 2CH (8Ω, EIAJ)
Main Pitch Degree	13degrees ±3.0DSP	13degrees ±3.0DSP
Audio Input	3 systems (KARAOKE, AUX1, AUX2)	3 systems (KARAOKE, AUX1, AUX2)
Video Input	3 systems (KARAOKE, AUX1, AUX2)	3 systems (KARAOKE, AUX1, AUX2)
Mic Input	5 systems : front 3, rear 2	5 systems : front 3, rear 2
Echo	Preset 6 Echoes	Preset 6 Echoes
Sound Effect	Preset 6 Sound Effects	Preset 6 Sound Effects
Equalizer	10 bands (Music, Mic)	10 bands (Music, Mic)
LCD Display	480×272 dots TFT Color LCD	480×272 dots TFT Color LCD
AC Input	AC110V~120V (50/60 Hz) : DAS-400 (SE)-100 AC220V~240V (50/60 Hz) : DAS-400 (SE)-200	AC110V~120V (50/60 Hz) : DAS-200 (SE)-100 AC220V~240V (50/60 Hz) : DAS-200 (SE)-200
Dimensions (mm)	420(W) × 135(H) × 335(D)	420(W) × 135(H) × 335(D)
Weight	12.5kg	10.5kg

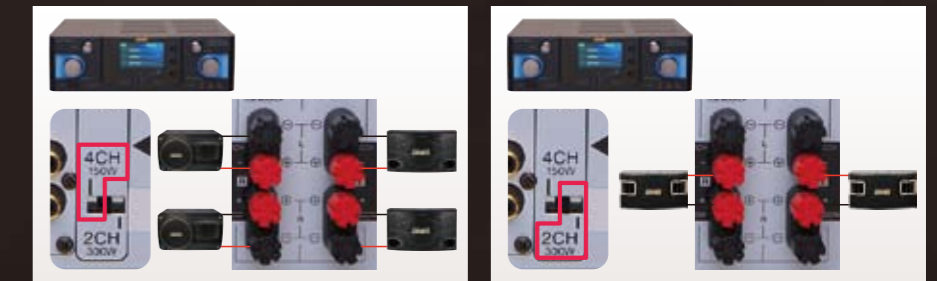

● How to connect (150W × 4CH Mode) ● How to connect (300W × 2CH Mode)