


DAS SERIES

High-Tech and High Quality Karaoke Digital Amplifier with Large LCD Panel

This model has a large multi-purpose color LCD panel.

The latest digital amplifier IC made it possible to make the amplifier smaller and lighter.

The user can switch between 300W x 2ch and 150W x 4ch. (DAS-300)

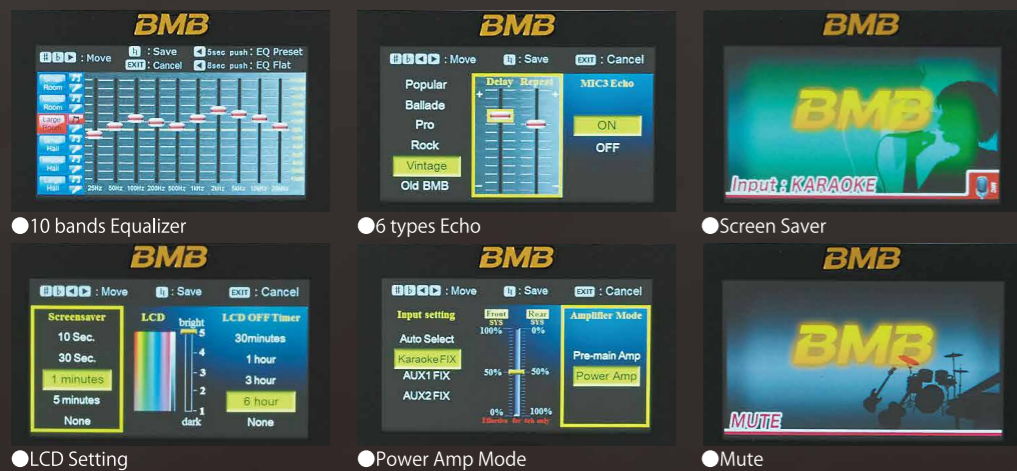

● 10 bands Equalizer

● 6 types Echo

● Screen Saver

● LCD Setting

● Power Amp Mode

● Mute



DAS-300 [SE]


DAS-150 [SE]

RMS-300

Max Output Power	300W×2CH (8Ω, EIAJ) :2 speakers system 150W×4CH (8Ω, EIAJ) :4 speakers system	150W×2CH (8Ω, EIAJ)
Main Pitch Degree	13degrees ±3.0DSP	13degrees ±3.0DSP
Audio Input	3 systems (KARAOKE, AUX1, AUX2)	3 systems (KARAOKE, AUX1, AUX2)
Video Input	3 systems (KARAOKE, AUX1, AUX2)	3 systems (KARAOKE, AUX1, AUX2)
Mic Input	5 systems:front 3,rear 2	5 systems:front 3,rear 2
Echo	Preset 6 Echoes	Preset 6 Echo
Sound Effect	Preset 6 Sound Effects	Preset 6 Sound Effects
Equalizer	10 bands (Music, Mic)	10 bands (Music, Mic)
LCD Display	480×272 dots TFT Color LCD	480×272 dots TFT Color LCD
AC Input	AC110V~120V (50/60 Hz) :DAS-300 (SE) -100 AC220V~240V (50/60 Hz) :DAS-300 (SE) -200	AC110V~120V (50/60 Hz) :DAS-150 (SE) -100 AC220V~240V (50/60 Hz) :DAS-150 (SE) -200
Dimensions (mm)	420 (W) × 135 (H) × 335 (D)	420 (W) × 135 (H) × 335 (D)
Weight	12.5kg	10.5kg



● How to connect (300W×2CH Mode)

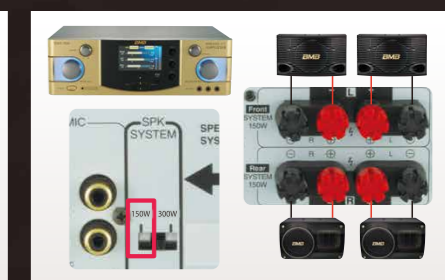

● How to connect (150W×4CH Mode)